

**Strap more pallets
with a single machine**




Strapper
**Automatic
multi-station**

2913

Automatic machine for horizontal strapping of pallets in multiple stations.

It moves laterally between four strapping stations.
Fast, reliable and quality strapping.
Maximum time savings in pallet feeding.
Touch screen control system very easy to program.
Up to 50 customizable strapping programs.
Allows to have all the pallets pending to be strapped ordered.
You can strap at any height from 140 mm from the ground.
Capable of strapping up to 20 different heights on one pallet.
Integrable in an automatic line or independently.
Long useful life of the equipment and little maintenance.
Protection and security systems.
Compact the load before strapping.
It allows to reach a production of 70 pallets every hour.

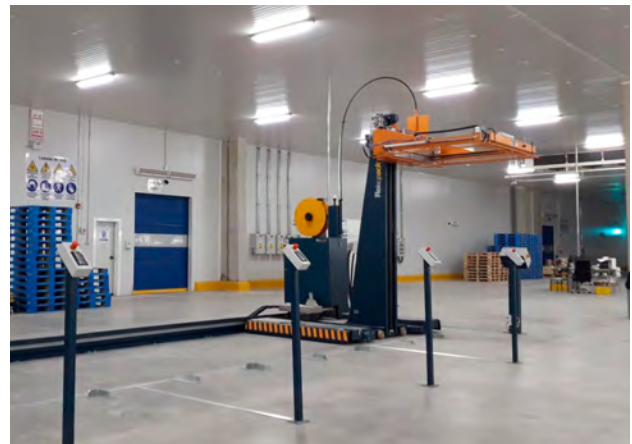

OPTIONS:

High speed version.
Electronic tension control.
VPN access to machine software.



The control panel has been completely redesigned with a touch screen and a new & more intuitive interface.

The arch incorporates a LED indicator light with different colors to show the status of the machine at all times.

GENERAL CHARACTERISTICS


REQUIRED VOLTAGE: 220/380 V · 50/60 Hz · 3 Phases

POWER: 2 Kw **PRODUCTION:** 1 pallet / min (5 straps)

MACHINE DIMENSIONS
2902 (W) x 4180 (L) x 4550 (H) mm

TECHNICAL SPECIFICATIONS

STRAP WIDTH: 11 - 12 mm **WELDING:** Adjustable
Electrical heating.
STRAP THICKNESS: 0,5 - 0,7 mm

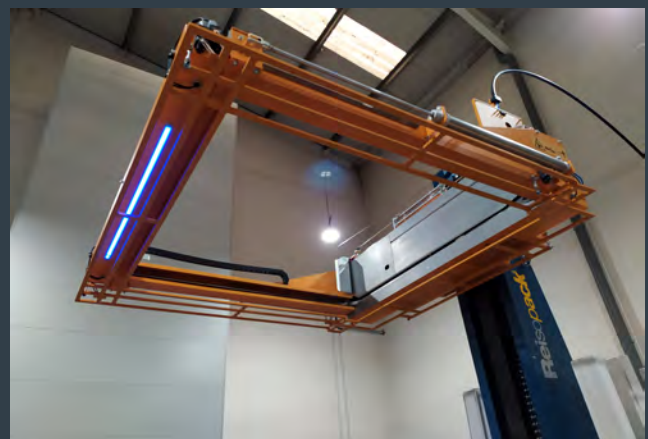

Edition 06/22 · The manufacturer reserves the right to make changes without prior notice.